

# 22" LED Monitor

MW-LC22-S




## Specifications

| Panel                           | Description                    |
|---------------------------------|--------------------------------|
| Panel Size                      | 21.45"                         |
| Pixel Pitch (H x V) (mm)        | 0.2493*0.241                   |
| Resolution                      | 1920 x 1080                    |
| Color Support                   | 16.7 M                         |
| Brightness (cd/m <sup>2</sup> ) | 250                            |
| Contrast Ratio                  | 3000:1                         |
| Refresh Rate                    | 100 Hz                         |
| Response Time (ms)              | 5ms                            |
| Viewing Angle (H/V)             | Horizontal 178°, Vertical 178° |
| Display Size (mm)               | 478.656(H)*260.28(V)           |
| Interface                       | Description                    |
| Video Input                     | 1 x HDMI, 1 x VGA              |
| Audio Input                     | 1×Audio                        |
| Speaker                         | Description                    |
| Speaker                         | 2 × 1.5W                       |

| VESA                                   | Description                                                      |
|----------------------------------------|------------------------------------------------------------------|
| VESA (mm)                              | 75 x 75                                                          |
| OSD                                    | Description                                                      |
| Multi-Language                         | English, German, French, Simplified Chinese, Traditional Chinese |
| General                                | Description                                                      |
| Input Voltage                          | DC 12 V, 2 A                                                     |
| Typical Power Consumption (W)          | ≤24                                                              |
| Standby Power Consumption (W)          | ≤0.5                                                             |
| Product Dimensions (W x H x D)<br>(mm) | 492.7*284.0*41.2                                                 |
| Package Dimensions (W x H x D)<br>(mm) | 598*99*366                                                       |
| Weight (Kg)                            | Net Weight: 2.05<br>Gross Weight: 2.86                           |
| Operating Temperature                  | 0°C ~ 40°C                                                       |
| Operating Humidity                     | 10% ~ 85% (No Condensation)                                      |
| Storage Temperature                    | -20°C ~ 60°C                                                     |
| Storage Humidity                       | 5% ~ 90% (No Condensation)                                       |
| Standard                               | HDMI Cable, Power Cable, Pedestal, Quick Guide                   |

## Dimensions

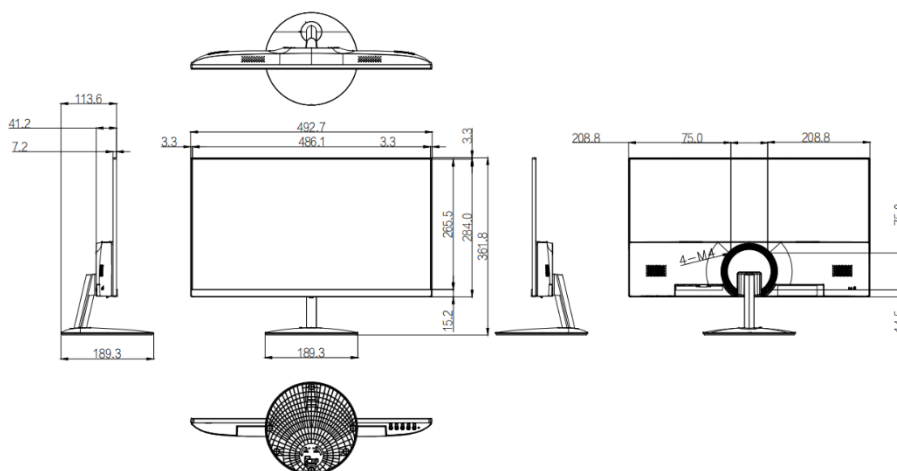

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.