

24" LED Monitor

MW-LC24-S




Specifications

Panel	Description
Panel Size	23.8"
Pixel Pitch (H x V) (mm)	0.2745 x 0.2745
Resolution	1920 x 1080
Color Support	16.7 M
Brightness (cd/m ²)	250
Contrast Ratio	1300:1
Refresh Rate	100 Hz
Response Time (ms)	5ms
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Display Size (mm)	527.04(H)*296.46(V)
Interface	Description
Video Input	1 x HDMI, 1 x VGA
Audio Input	1 × Audio
Speaker	Description
Speaker	2 × 1.5W

VESA	Description
VESA (mm)	75 x 75
OSD	Description
Multi-Language	English, German, French, Simplified Chinese, Traditional Chinese
General	Description
Input Voltage	DC 12 V, 2 A
Typical Power Consumption (W)	≤24
Standby Power Consumption (W)	≤0.5
Product Dimensions (W x H x D) (mm)	539.2*320.4*41.3
Package Dimensions (W x H x D) (mm)	612*101*405
Weight (Kg)	Net Weight: 2.79 Gross Weight: 4
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 85% (No Condensation)
Storage Temperature	-20°C ~ 60°C
Storage Humidity	5% ~ 90% (No Condensation)
Standard	HDMI Cable, Power Cable, Pedestal, Quick Guide

Dimensions

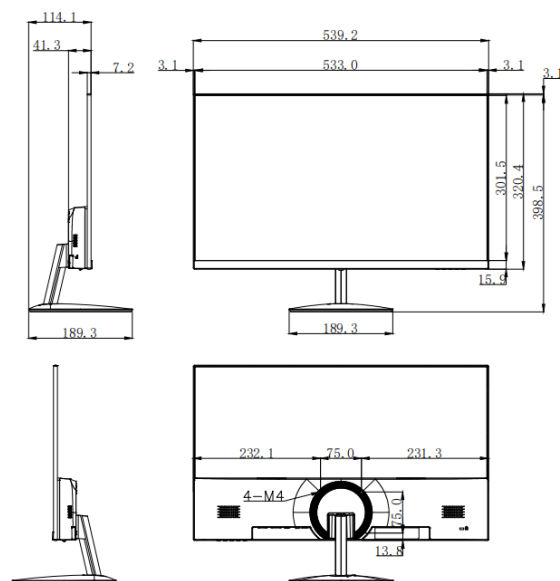

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.